


1. Bhopal:

- a) **Coverage Gap** - The coverage distribution found less than the minimum specified signal strength for the drive test route in auto-selection mode (5G/4G/3G/2G) during voice testing, is as below: -

Parameter	AIRTEL	BSNL	RJIL	VIL
Total Number of Samples captured on Drive test route	55360	54034	51838	55208
Number of Samples having poor signal strength	293	1532	131	473
Number of Samples having limited service (No Coverage)	0	505	0	0

Note: Signal strength has been considered poor if it falls below -110 dBm for 5G & 4G, -90 dBm for 3G, and -85 dBm for 2G.

Coverage Gap observed

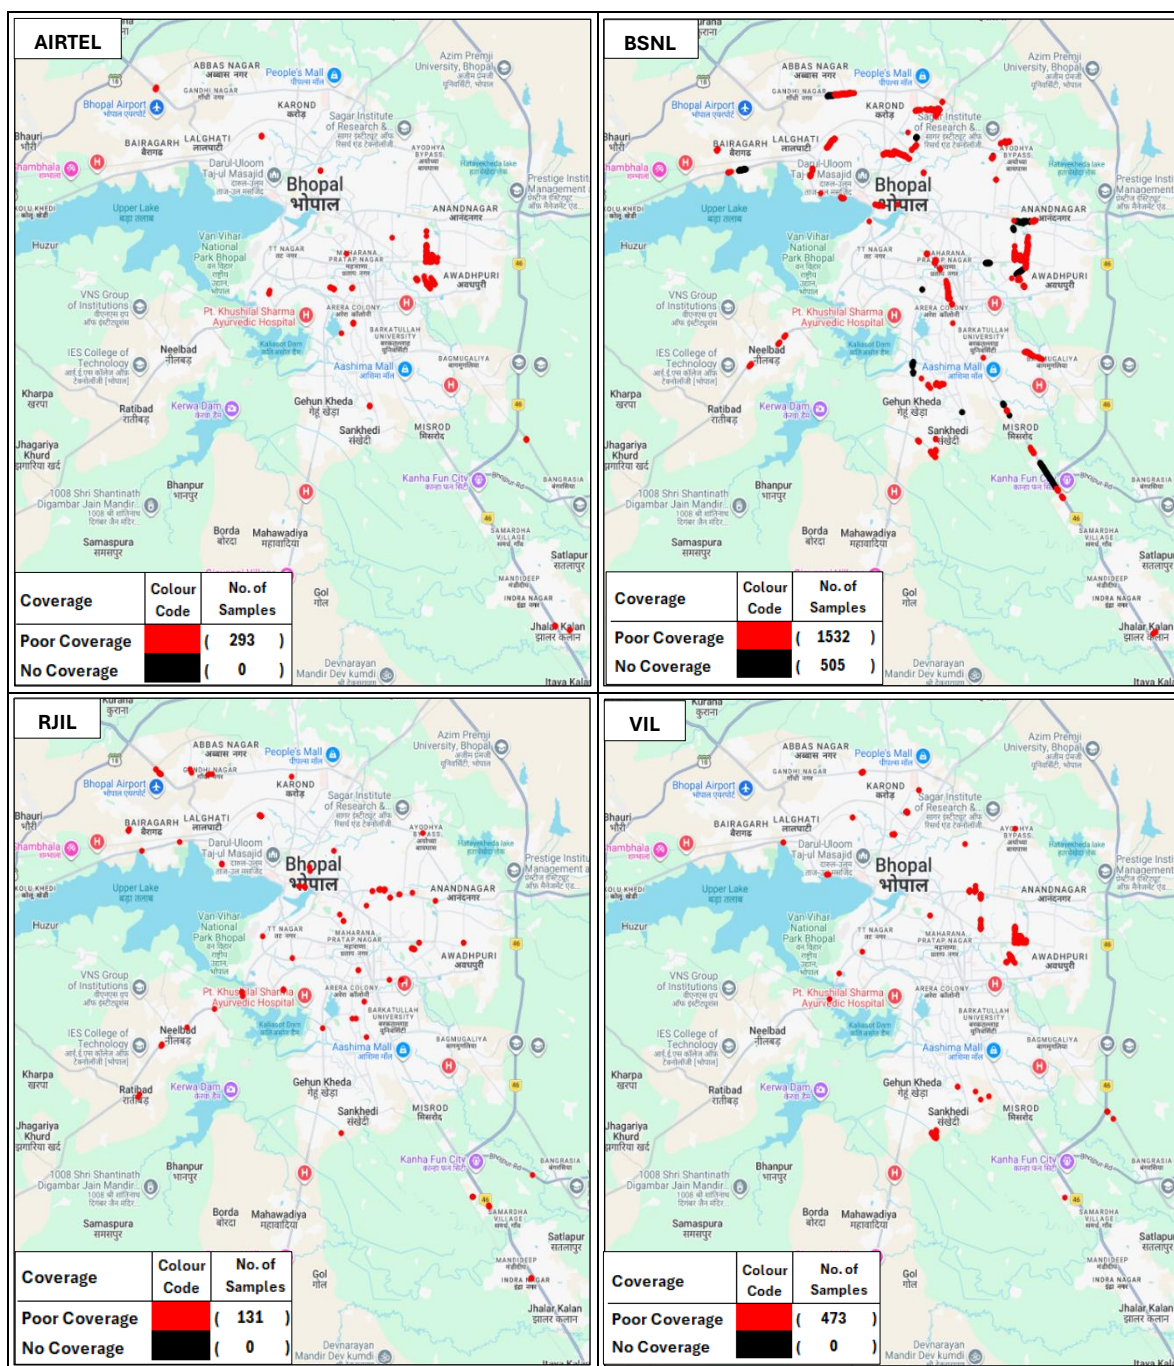


Note: Plot is based on Dynamic Drive Test results only.

b) Dropped Calls - The TSP-wise details of dropped calls in auto-selection mode (5G/ 4G/ 3G/ 2G) are as below:

Parameter	AIRTEL	BSNL	RJIL	VIL
Number of successful Calls Established	494	432	495	494
Number of dropped Calls	3	16	1	1

Locations of Dropped Calls

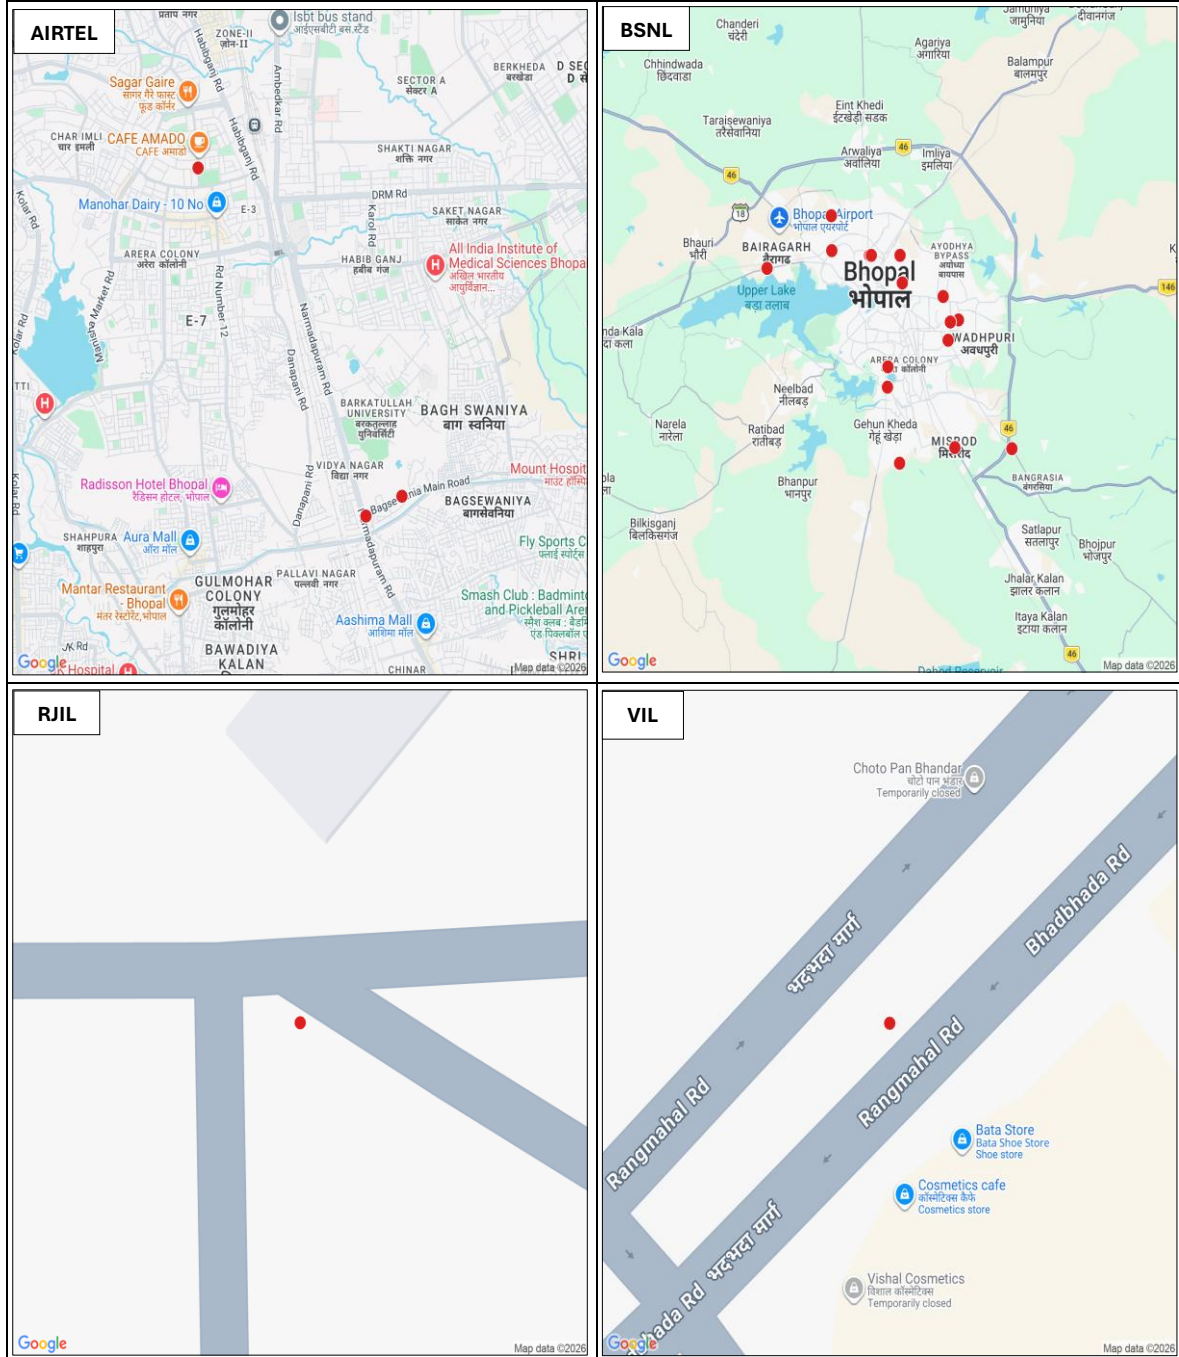


Note: Dropped calls locations are shown in red colour and which can be clicked to know the exact location (latitude and longitude) on the maps.

c) Call Silence Instance - The TSP-wise details of Call silence instance in Auto-selection mode (5G/4G) are as below:

Parameter	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider network)	476	419	478	481
Number of silences calls for >3 Sec	4	21	3	4
Total number of silence instances for >3 Sec	4	25	3	4

Locations of Call Silence Instance

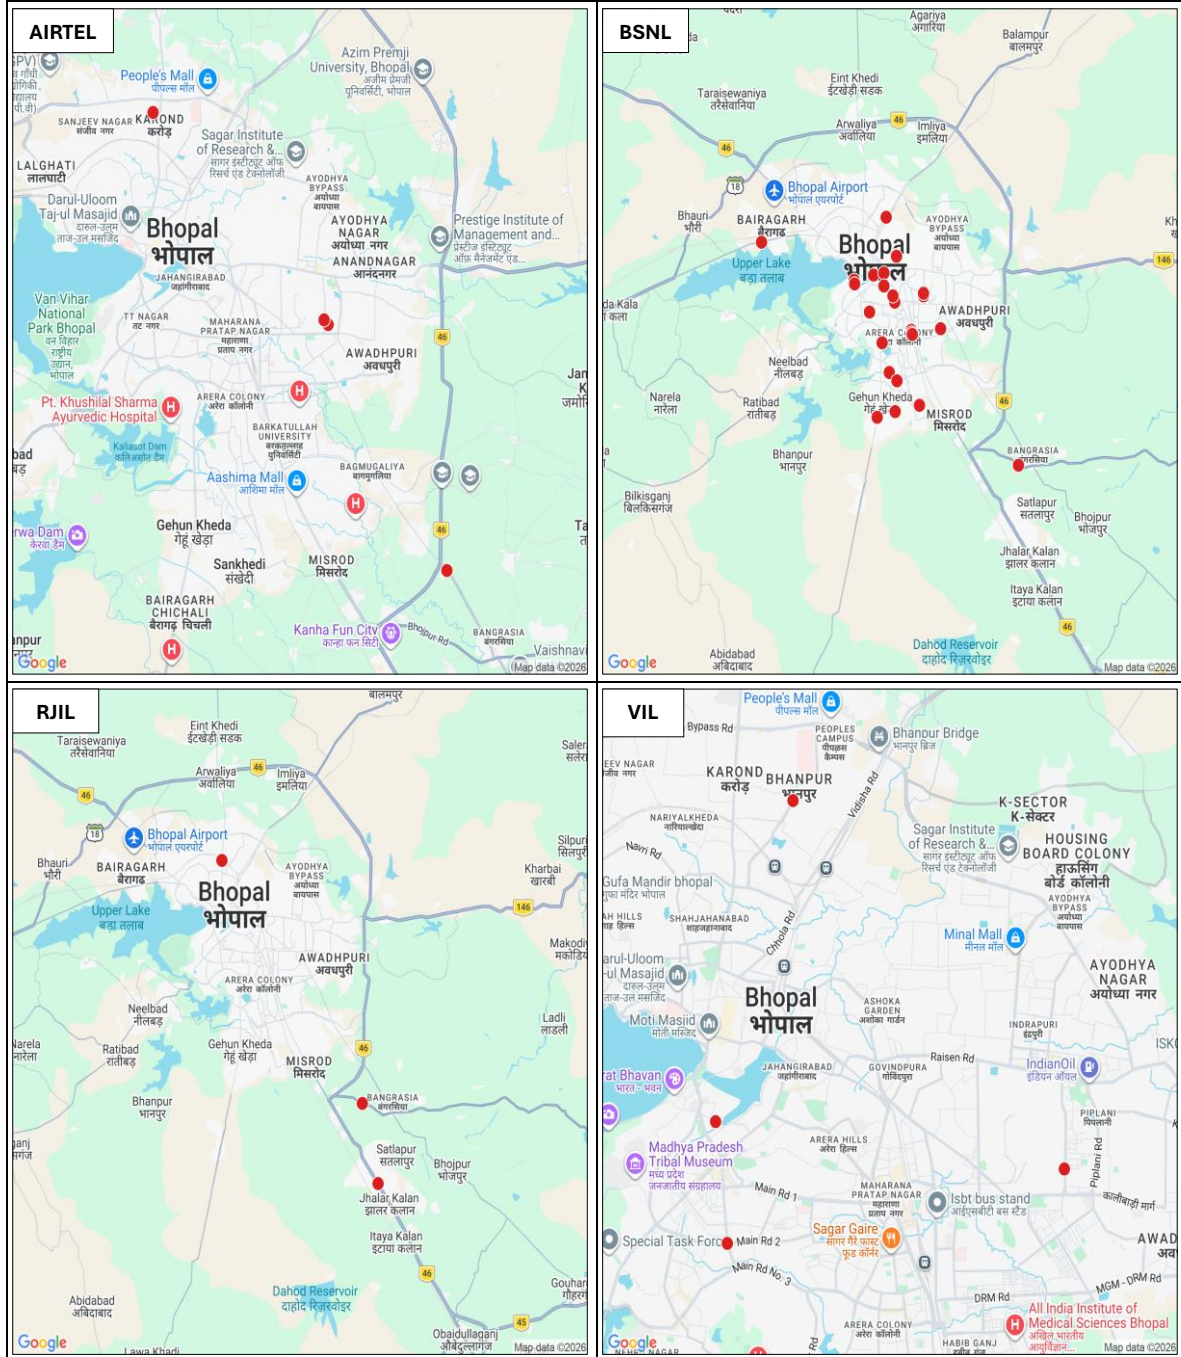


Note: Call silence instances are shown in red colour and which can be clicked to know the exact location (latitude and longitude) on the map.

d) Data Download and Upload throughput: The TSP-wise details of Average Download (DL) and Upload (UL) throughput against declared typical DL/UL Throughput for month, in Auto-selection mode (5G/4G/3G/2G) are as below:

(i) Download Throughput


Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 5G)
Typical Download throughput declared by TSP	(Mbps/s)	18.53	5.00	15.00	15.00
Average Download Throughput measured during IDT	(Mbps/s)	44.25	10.68	291.53	63.96

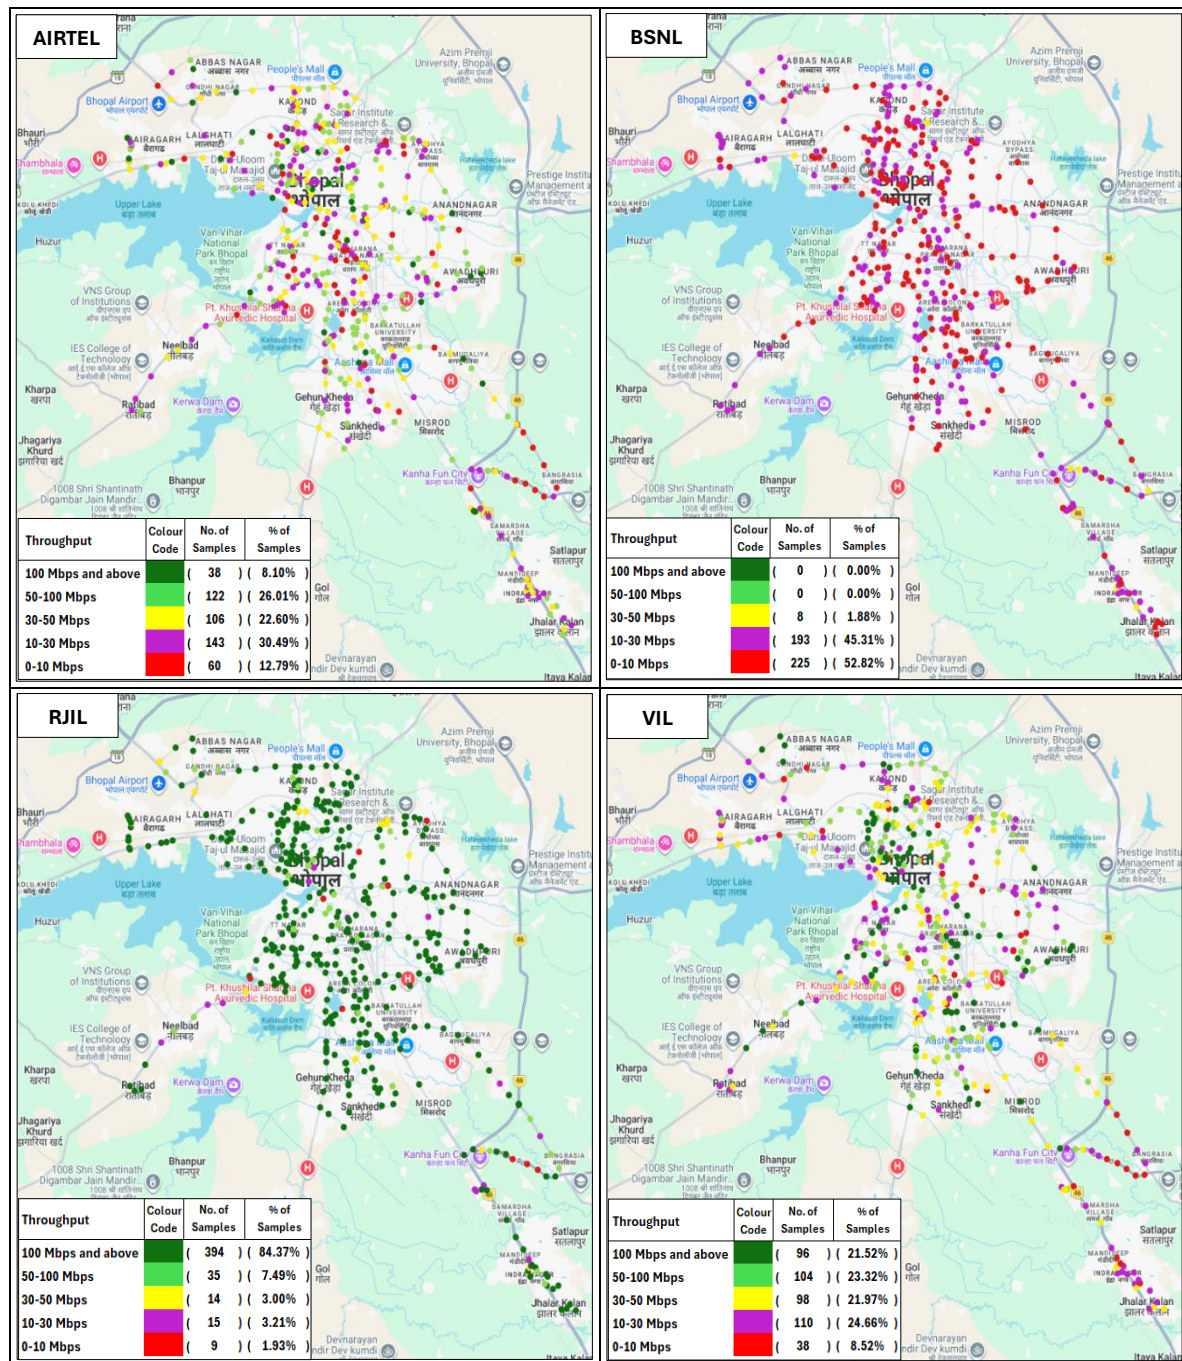

Note: Plot is based on Dynamic Drive Test results only.

(ii) Upload Throughput

Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 5G)
Typical upload throughput declared by TSP	(Mbits/s)	2.84	3.00	7.00	8.00
Average Upload Throughput measured during IDT	(Mbits/s)	15.49	7.20	34.92	12.50

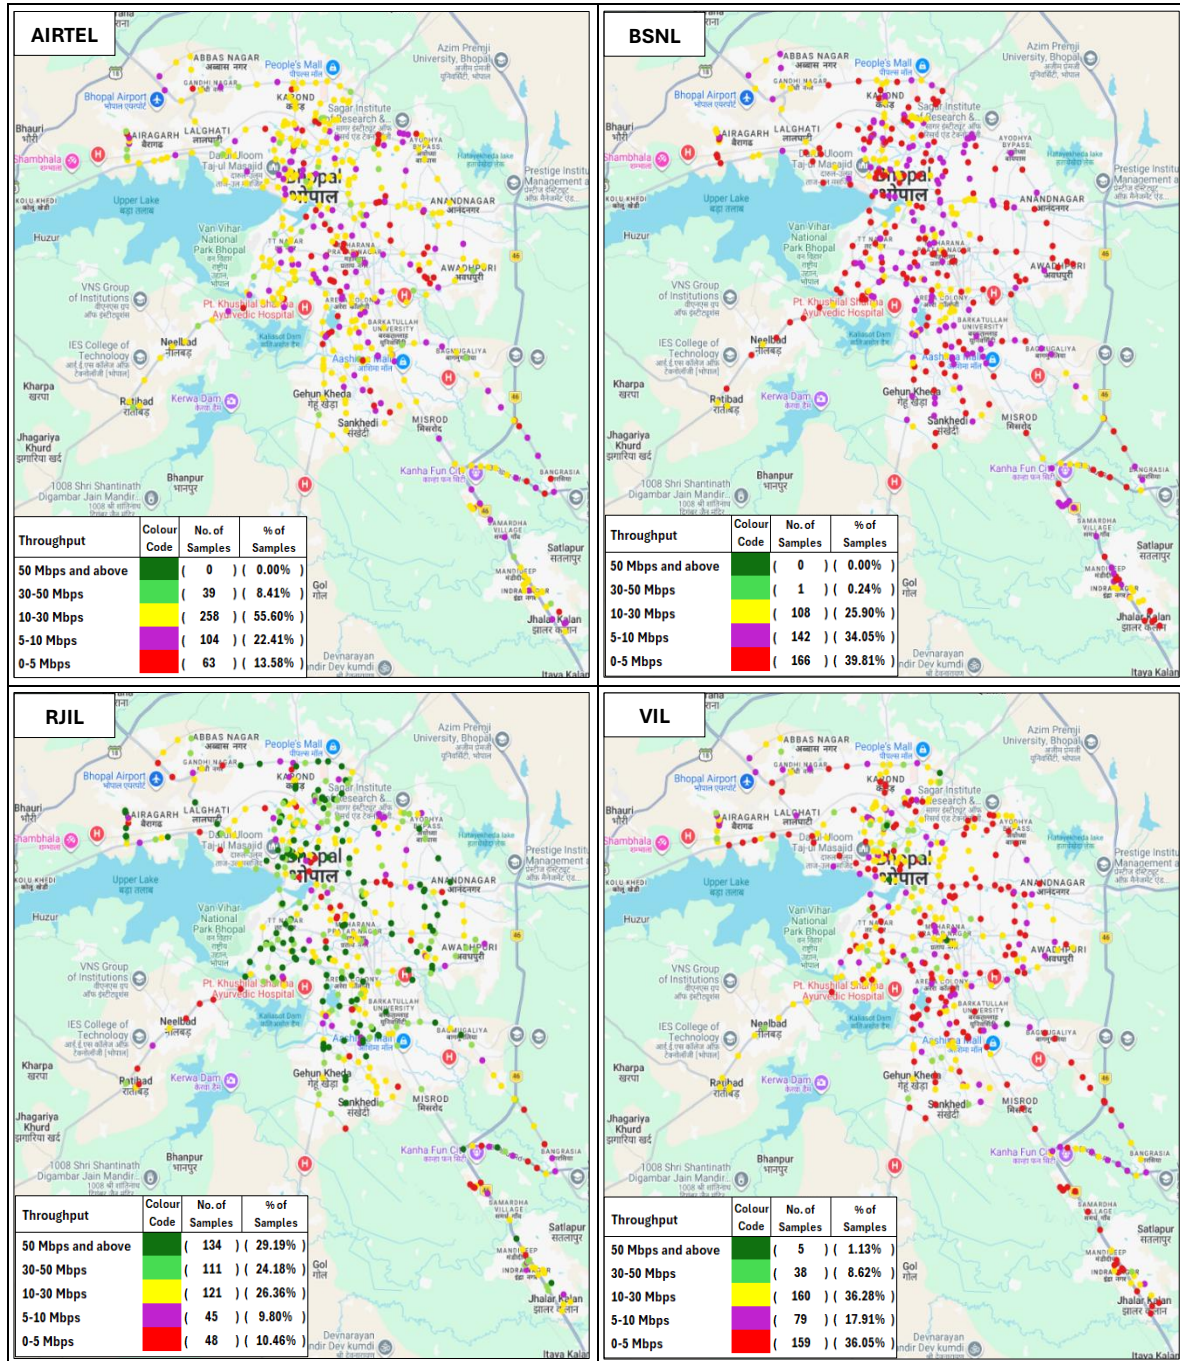

Note: Plot is based on Dynamic Drive Test results only.


2. Indore to Neemuch via Ratlam and Mandsaur Highway:

- a) **Coverage Gap** - The coverage distribution found less than the minimum specified signal strength for the drive test route in auto-selection mode (5G/4G/3G/2G) during voice testing, is as below: -

Parameter	AIRTEL	BSNL	RJIL	VIL
Total Number of Samples captured on Drive test route	23802	22818	25022	23734
Number of Samples having poor signal strength	442	7023	822	557
Number of Samples having limited service (No Coverage)	0	373	0	0

Note: Signal strength has been considered poor if it falls below -110 dBm for 5G & 4G, -90 dBm for 3G, and -85 dBm for 2G.

Coverage Gap observed

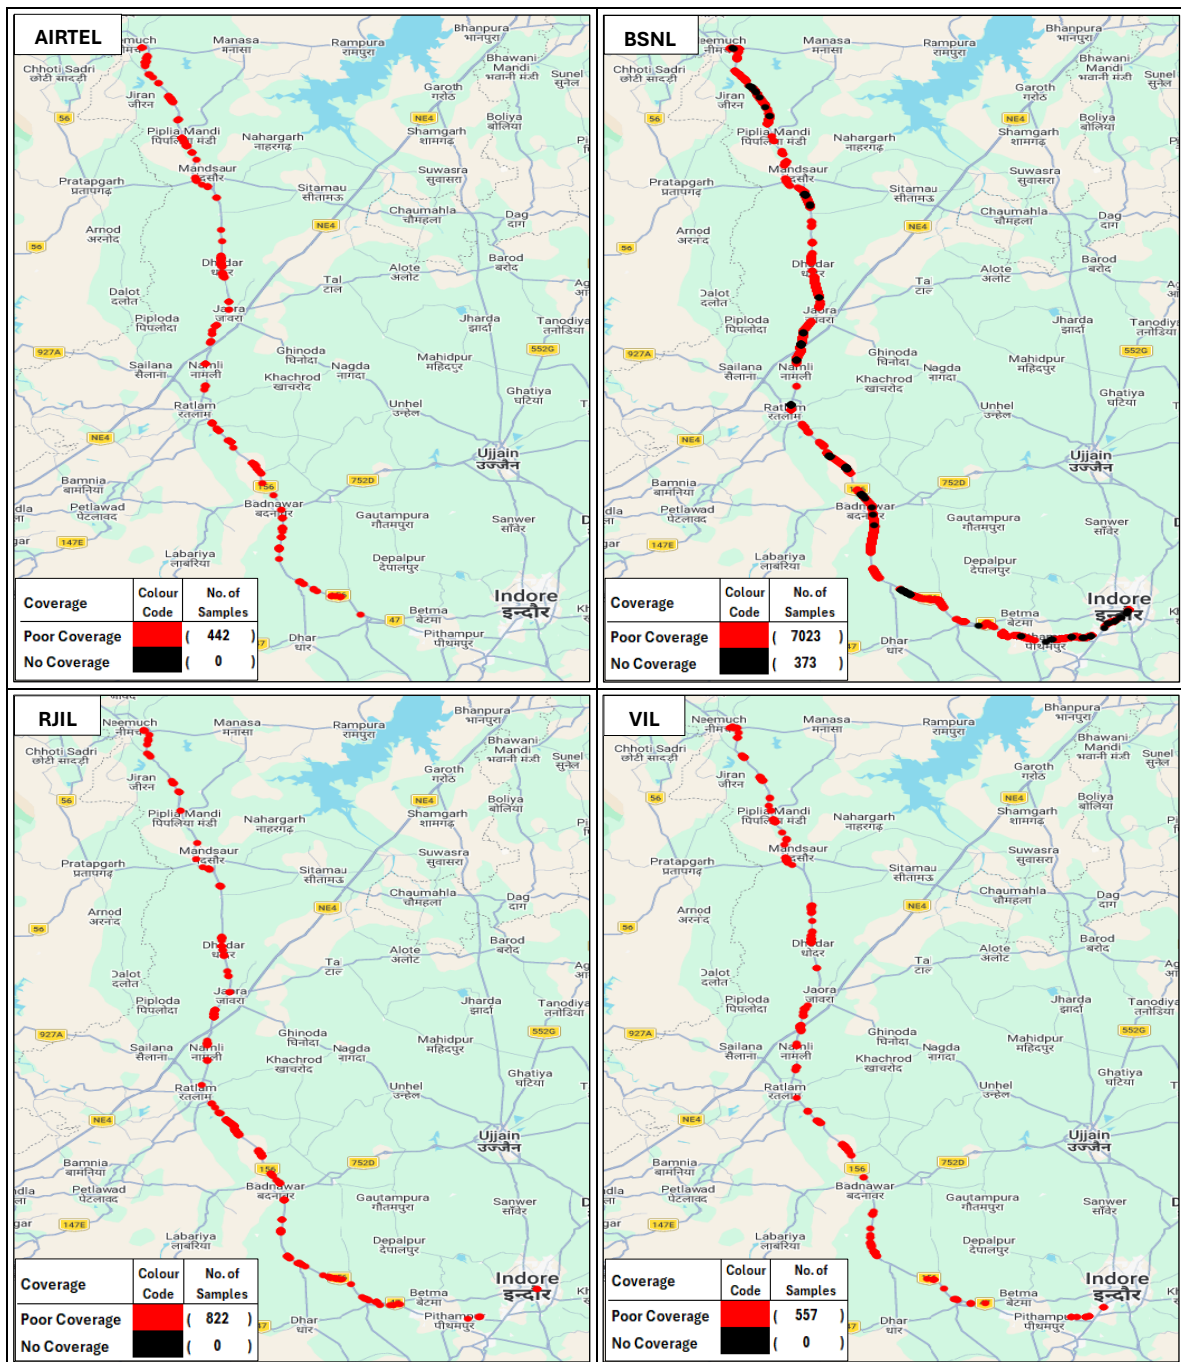


Note: Plot is based on Dynamic Drive Test results only.

b) Dropped Calls - The TSP-wise details of dropped calls in auto-selection mode (5G/ 4G/ 3G/ 2G) are as below:

Parameter	AIRTEL	BSNL	RJIL	VIL
Number of successful Calls Established	120	116	125	118
Number of dropped Calls	1	14	0	1

Locations of Dropped Calls

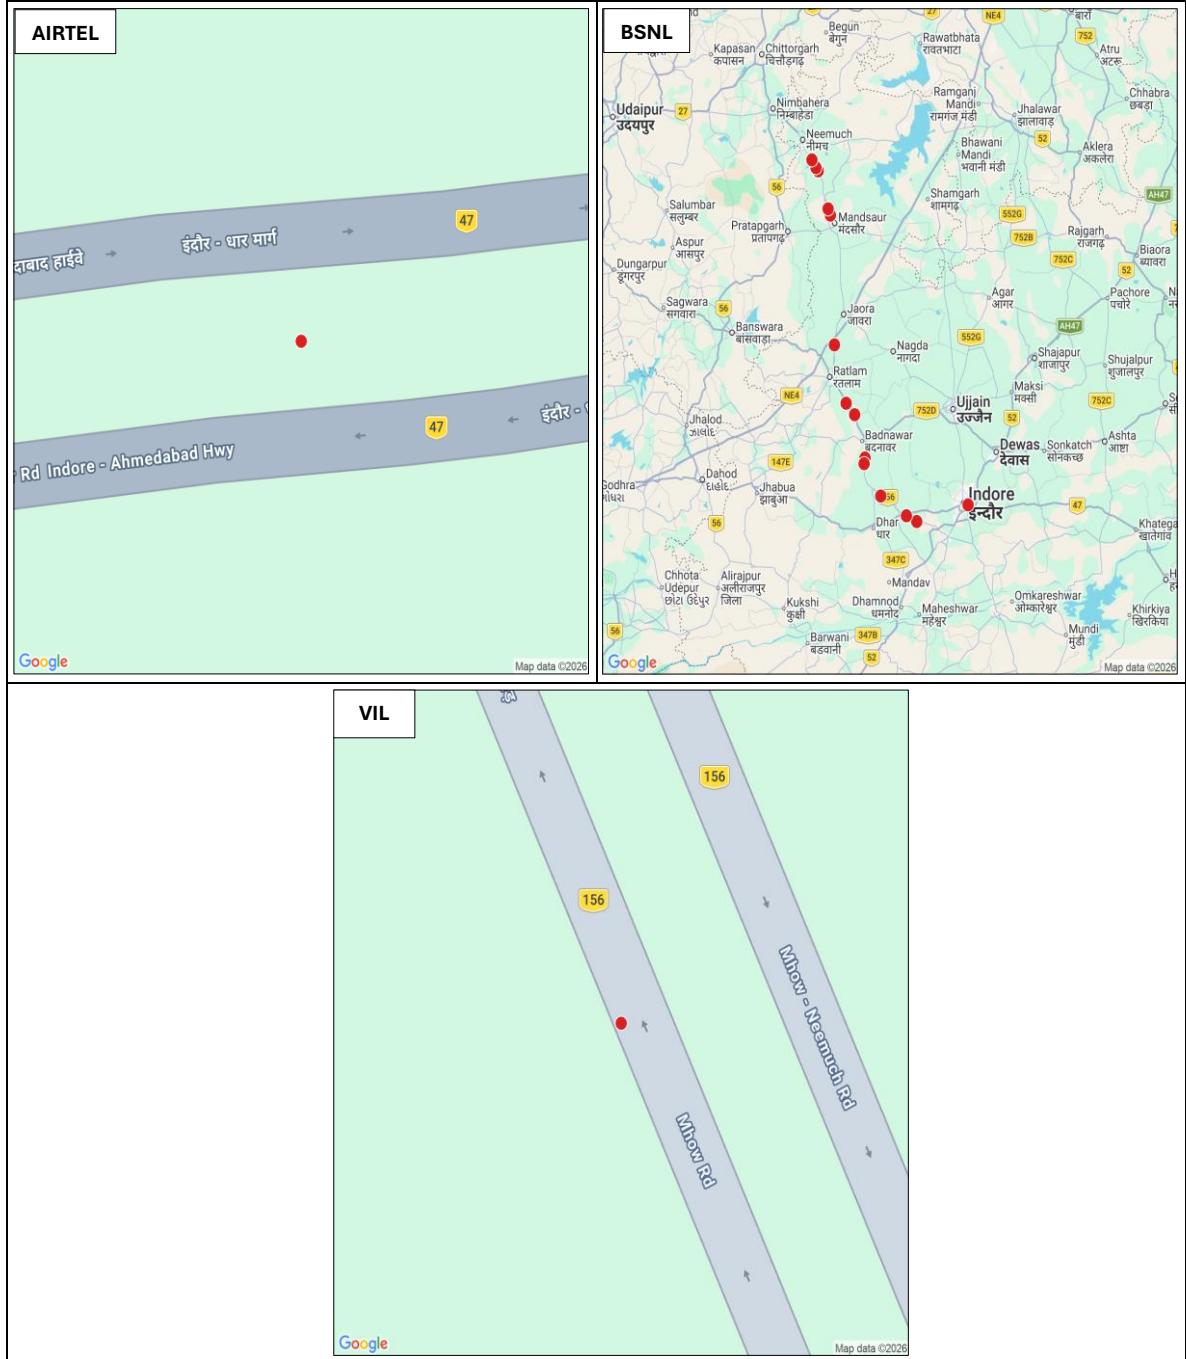


Note: Dropped calls locations are shown in red colour and which can be clicked to know the exact location (latitude and longitude) on the maps.

c) **Call Silence Instance** - The TSP-wise details of Call silence instance in Auto-selection mode (5G/4G) are as below:

Parameter	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider network)	101	117	101	101
Number of silences calls for >3 Sec	0	10	1	4
Total number of silence instances for >3 Sec	0	11	1	4

Locations of Call Silence Instance

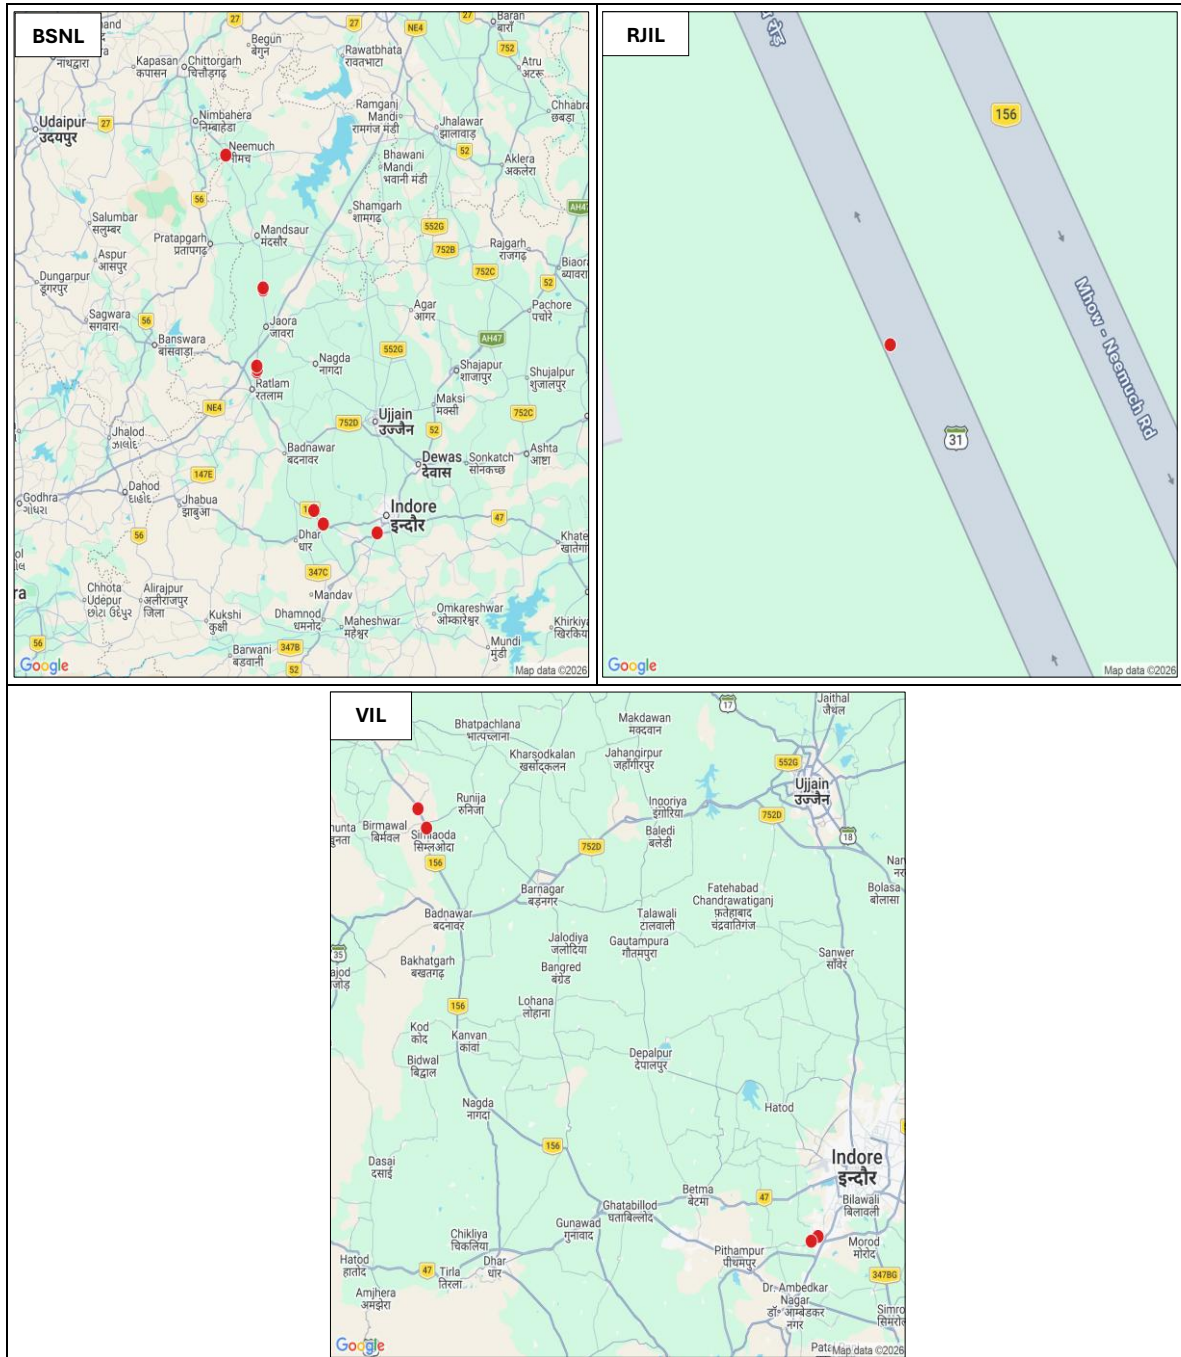


Note: Call silence instances are shown in red colour and which can be clicked to know the exact location (latitude and longitude) on the map.

d) Data Download and Upload throughput: The TSP-wise details of **Average Download (DL)** and **Upload (UL)** throughput against declared typical DL/UL Throughput for month, in Auto-selection mode (5G/4G/3G/2G) are as below:

(i) Download Throughput


Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 5G)
Typical Download throughput declared by TSP	(Mbits/s)	18.53	5.00	15.00	15.00
Average Download Throughput measured during IDT	(Mbits/s)	86.90	9.13	216.50	21.44

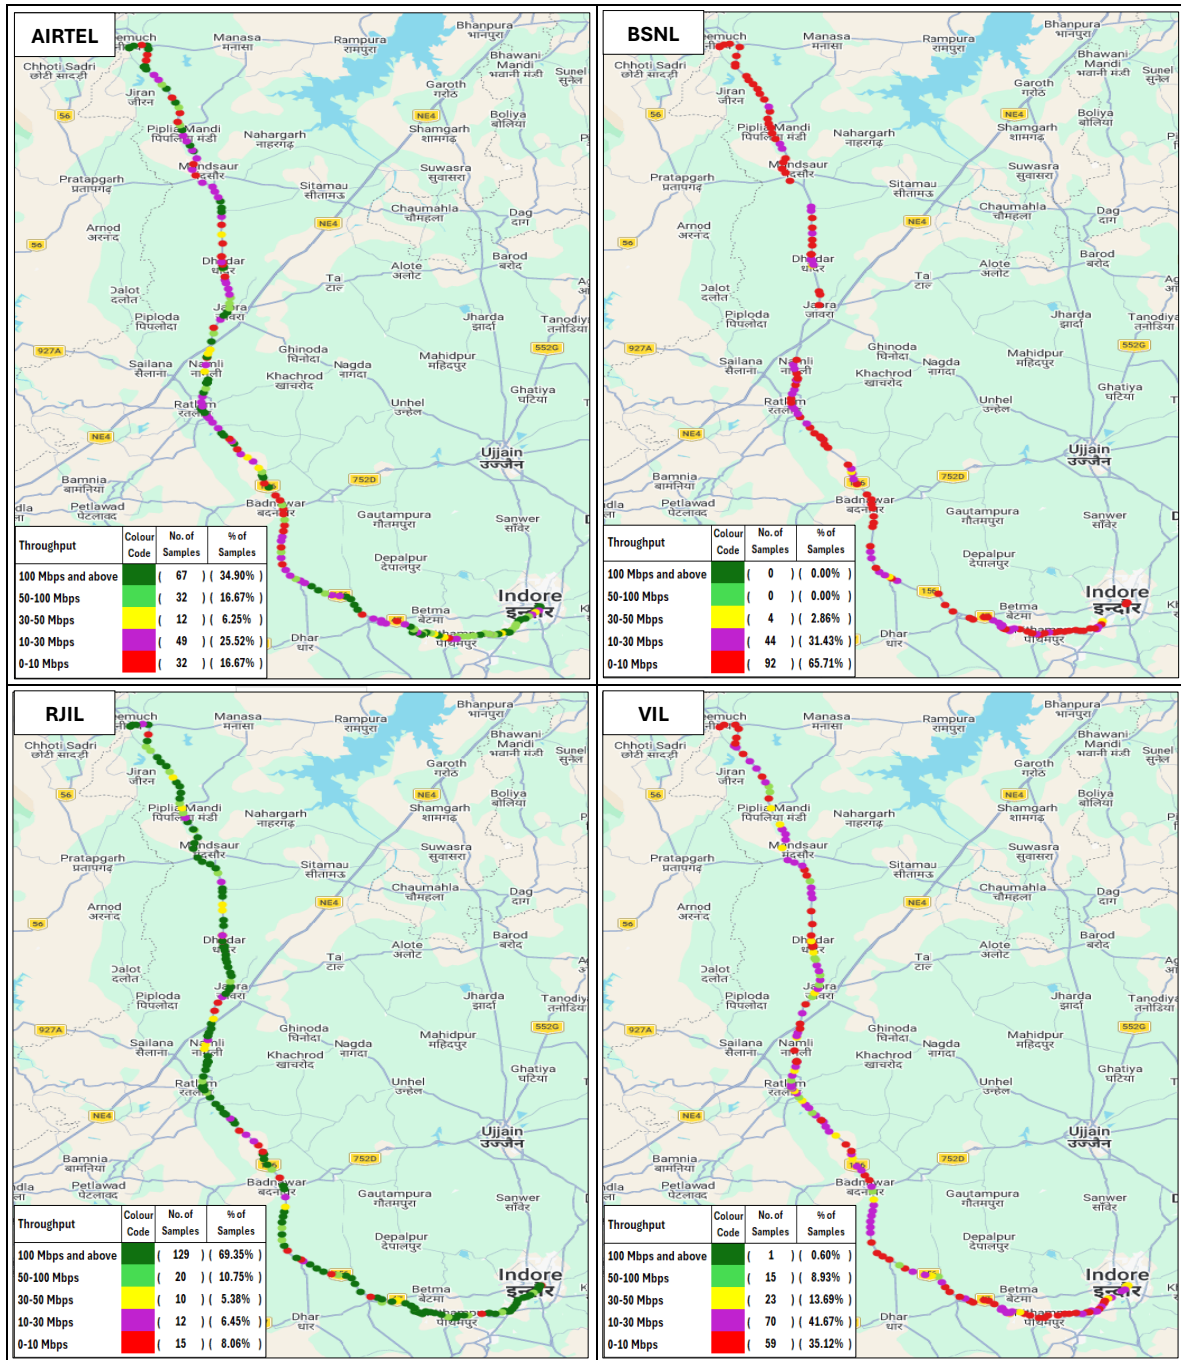

Note: Plot is based on Dynamic Drive Test results only.

(ii) Upload Throughput

Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 5G)
Typical upload throughput declared by TSP	(Mbits/s)	2.84	3.00	7.00	8.00
Average Upload Throughput measured during IDT	(Mbits/s)	20.84	5.80	19.30	10.71

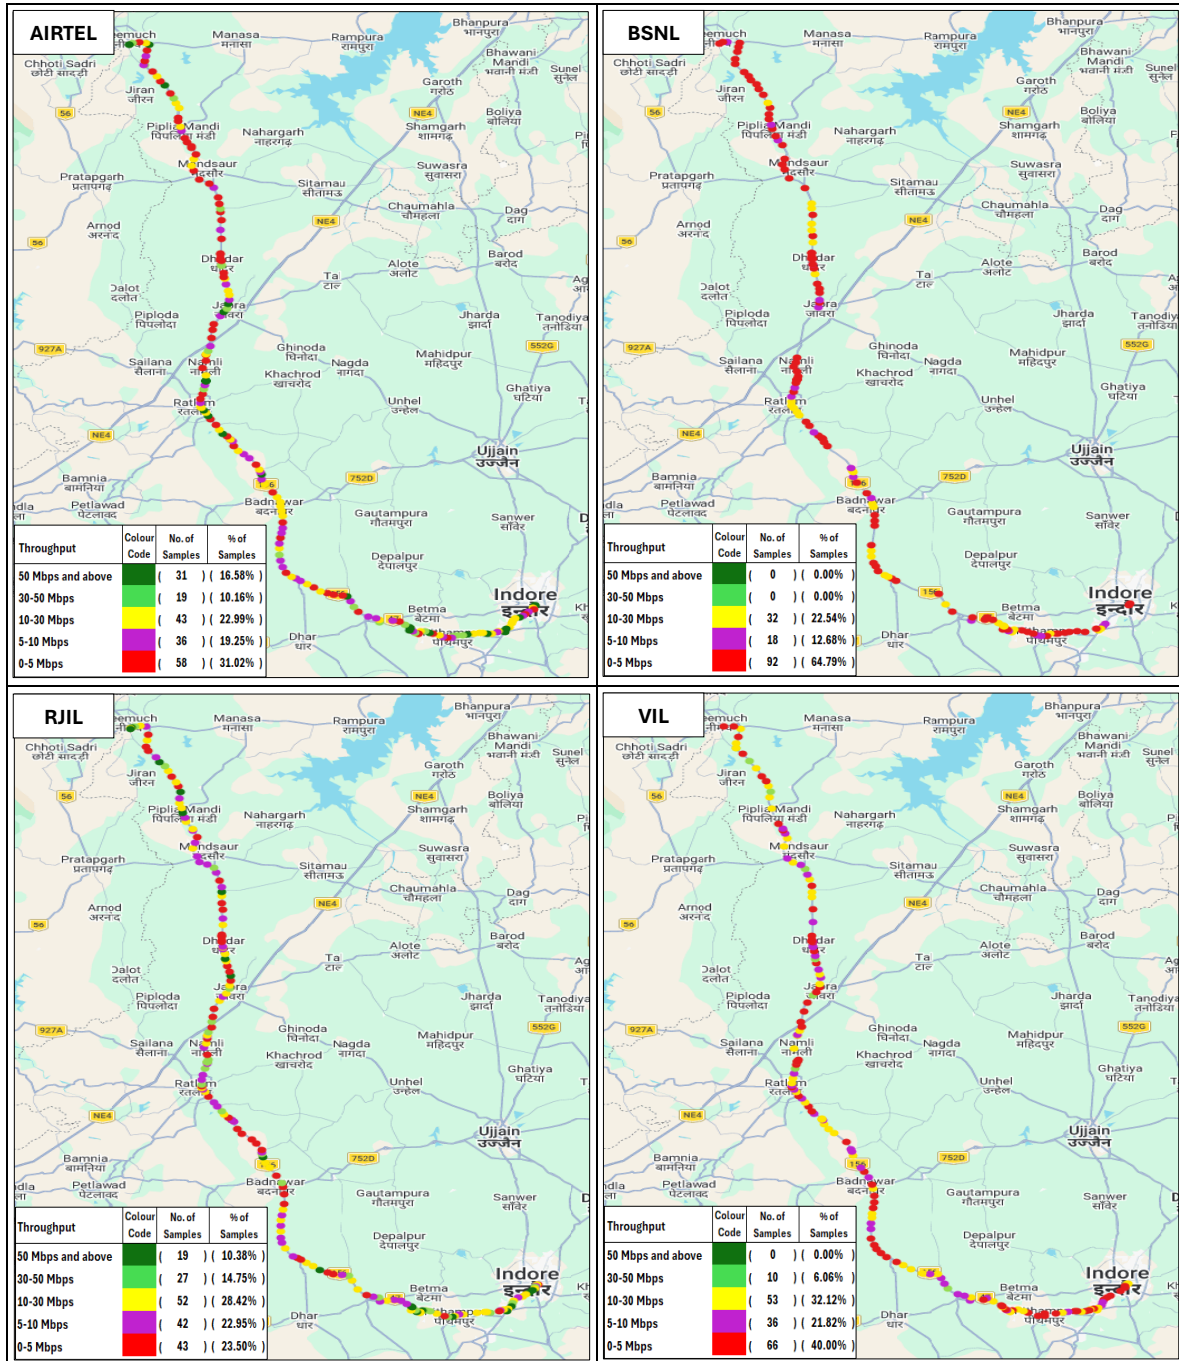

Note: Plot is based on Dynamic Drive Test results only.


3. Bilaspur to Ambikapur Highway:

- a) **Coverage Gap** – The coverage distribution found less than the minimum specified signal strength for the drive test route in auto-selection mode (5G/4G/3G/2G) during voice testing, is as below:

Parameter	AIRTEL	BSNL	RJIL	VIL
Total Number of Samples captured on Drive test route	17114	15288	17806	14622
Number of Samples having poor signal strength	3293	5201	2114	4548
Number of Samples having limited service (No Coverage)	342	1297	17	903

Note: Signal strength has been considered poor if it falls below -110 dBm for 5G & 4G, -90 dBm for 3G, and -85 dBm for 2G.

Coverage Gap observed

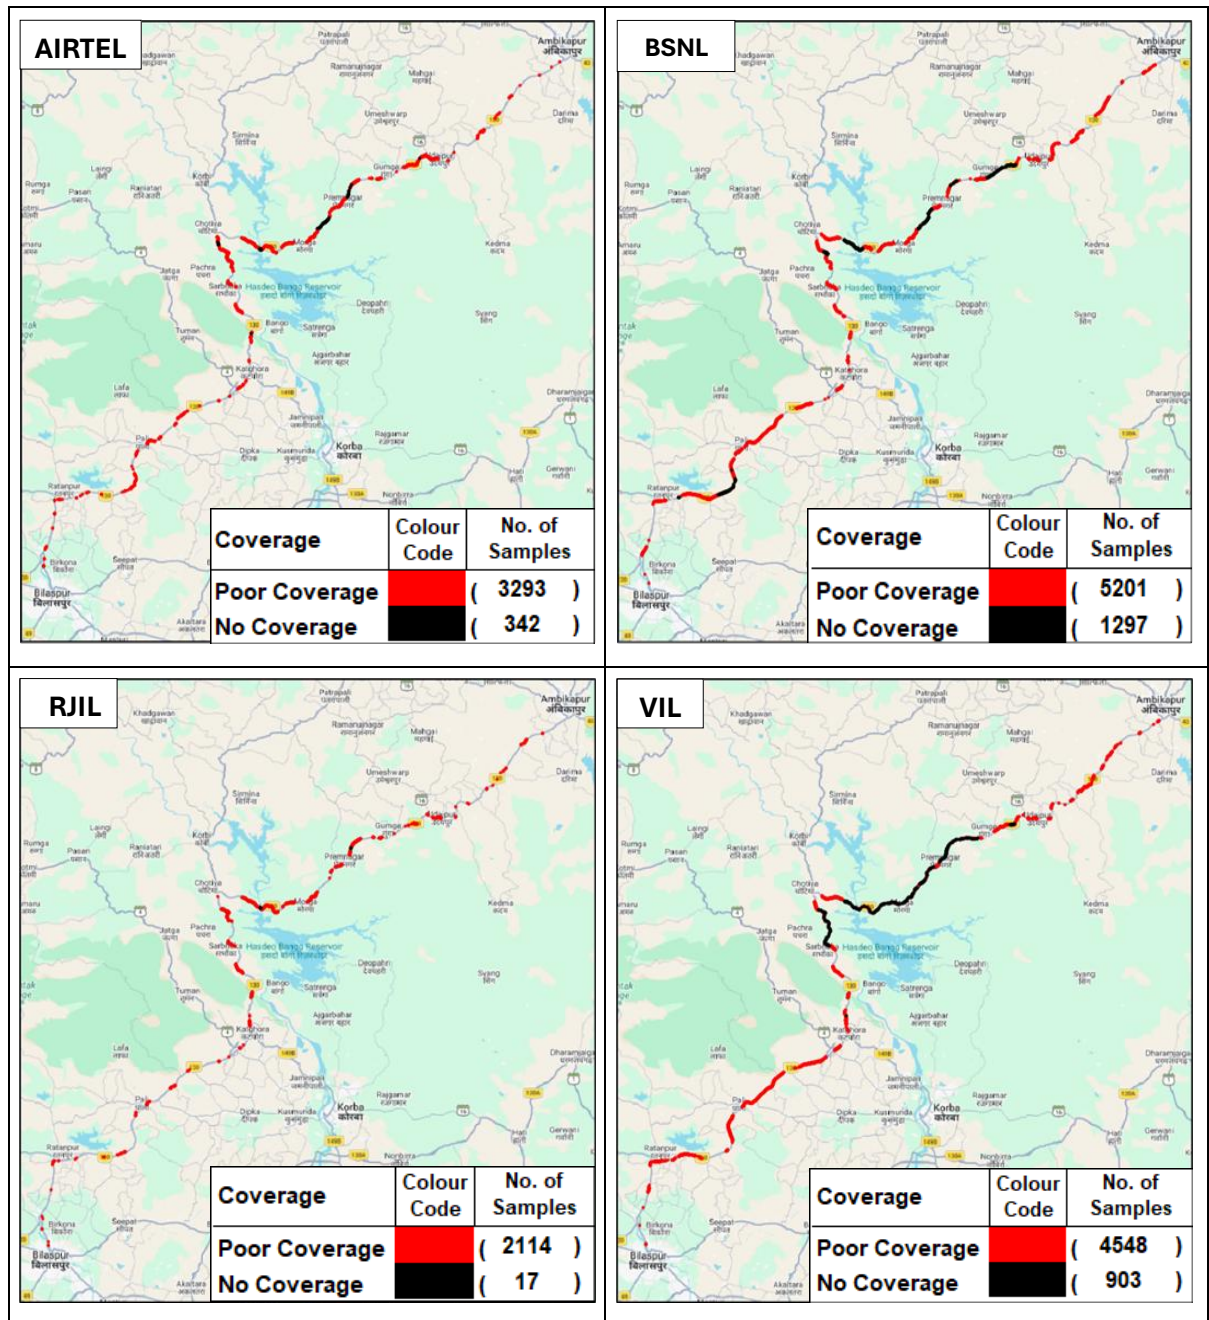


Note: Plot is based on Dynamic Drive Test results only.

b) Dropped Calls - The TSP-wise details of dropped calls in auto-selection mode (5G/ 4G/ 3G/ 2G) are as below:

Parameter	AIRTEL	BSNL	RJIL	VIL
Number of successful Calls Established	86	71	90	74
Number of dropped Calls	4	14	2	6

Locations of Dropped Calls

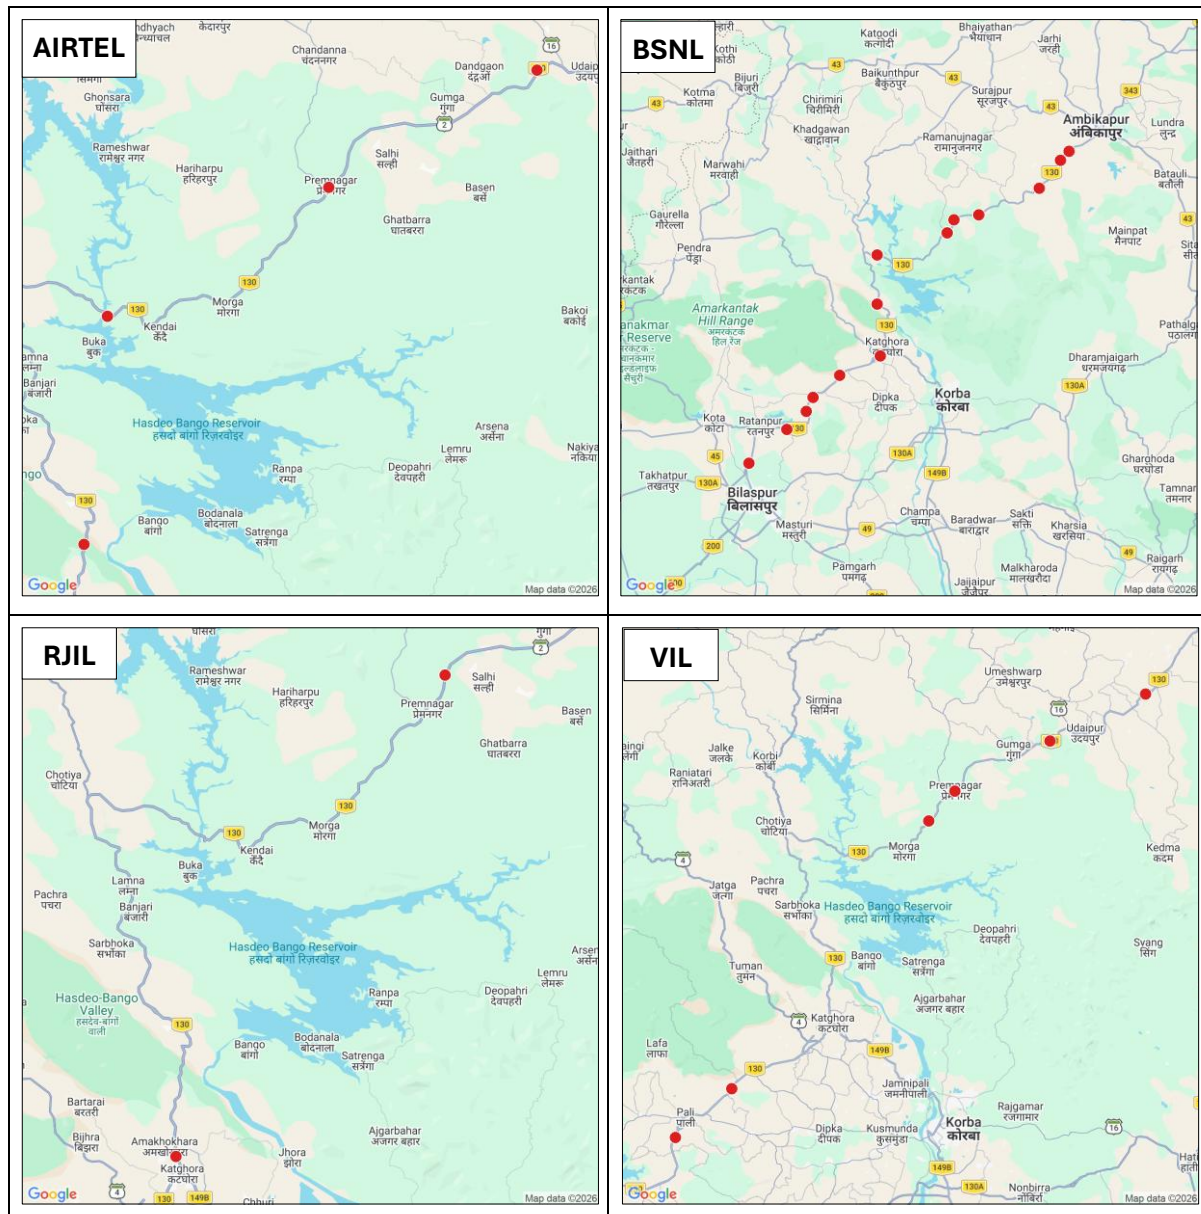


Note: Dropped calls locations are shown in red colour and which can be clicked to know the exact location (latitude and longitude) on the map.

c) **Call Silence Instance** - The TSP-wise details of Call silence instance in Auto-selection mode (5G/4G) are as below:

Parameter	AIRTEL	BSNL	RJIL	VIL
Call Established (within service provider network)	77	87	78	63
Number of silences calls for >3 Sec	7	8	4	3
Total number of silence instances for >3 Sec	10	14	7	3

Locations of Call Silence Instance

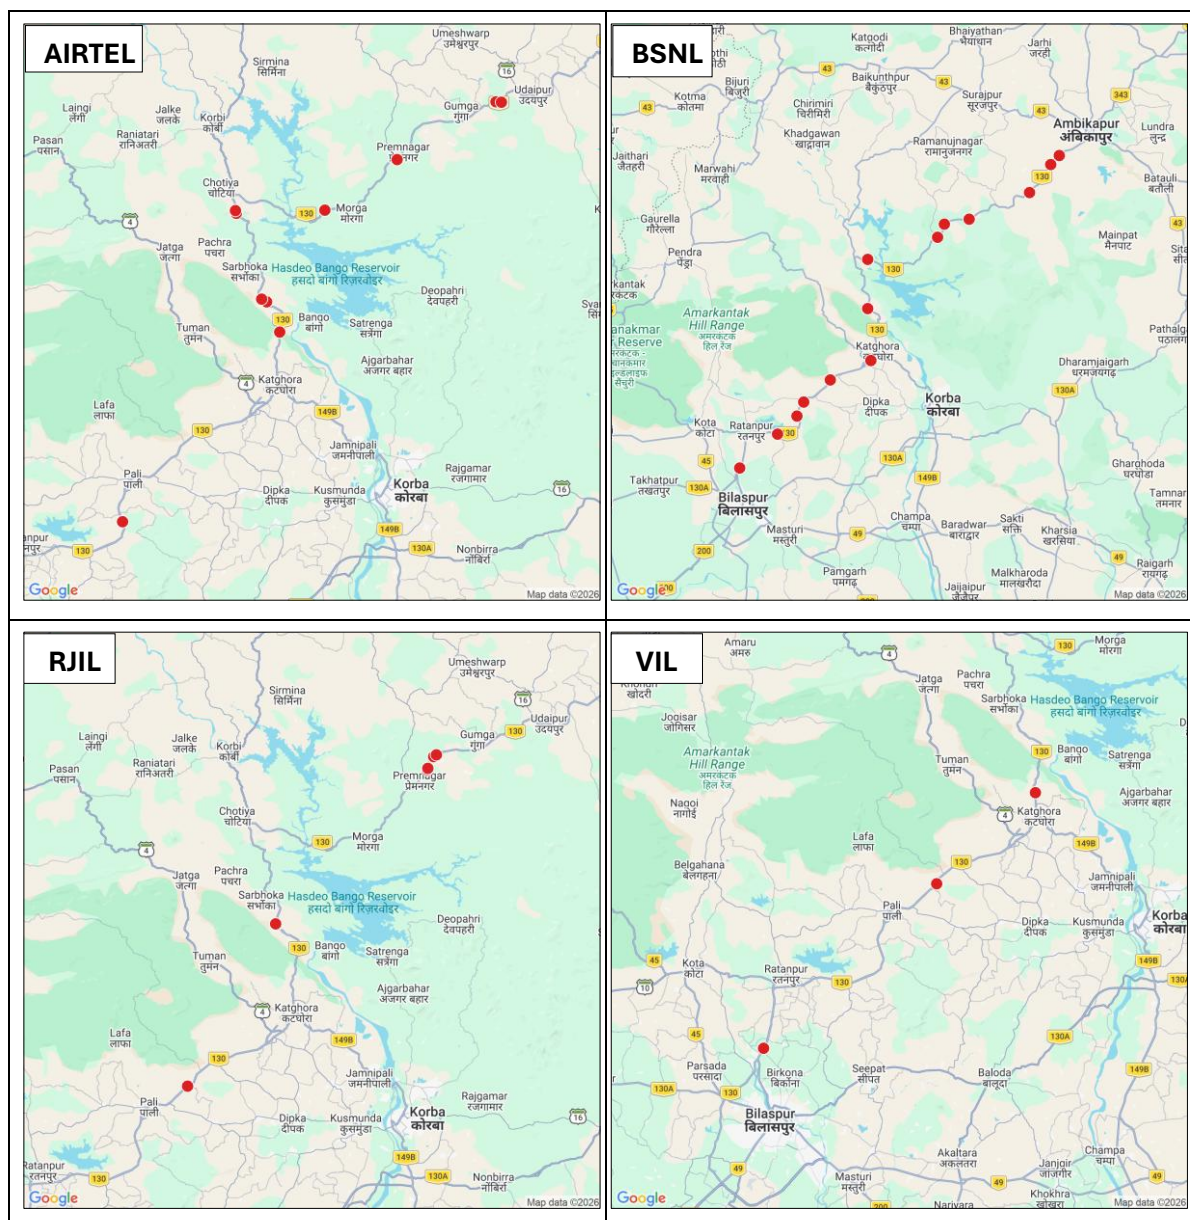


Note: Call silence instances are shown in red colour and which can be clicked to know the exact location (latitude and longitude) on the map.

d) Data Download and Upload throughput: The TSP-wise details of **Average Download (DL)** and **Upload (UL) throughput** against declared typical DL/UL Throughput for month, in Auto-selection mode (5G/4G/3G/2G) are as below:

(i) Download Throughput


Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 4G)
Typical Download throughput declared by TSP	(Mbits/s)	18.53	5.00	15.00	15.00
Average Download Throughput measured during IDT	(Mbits/s)	40.32	10.76	150.95	17.99

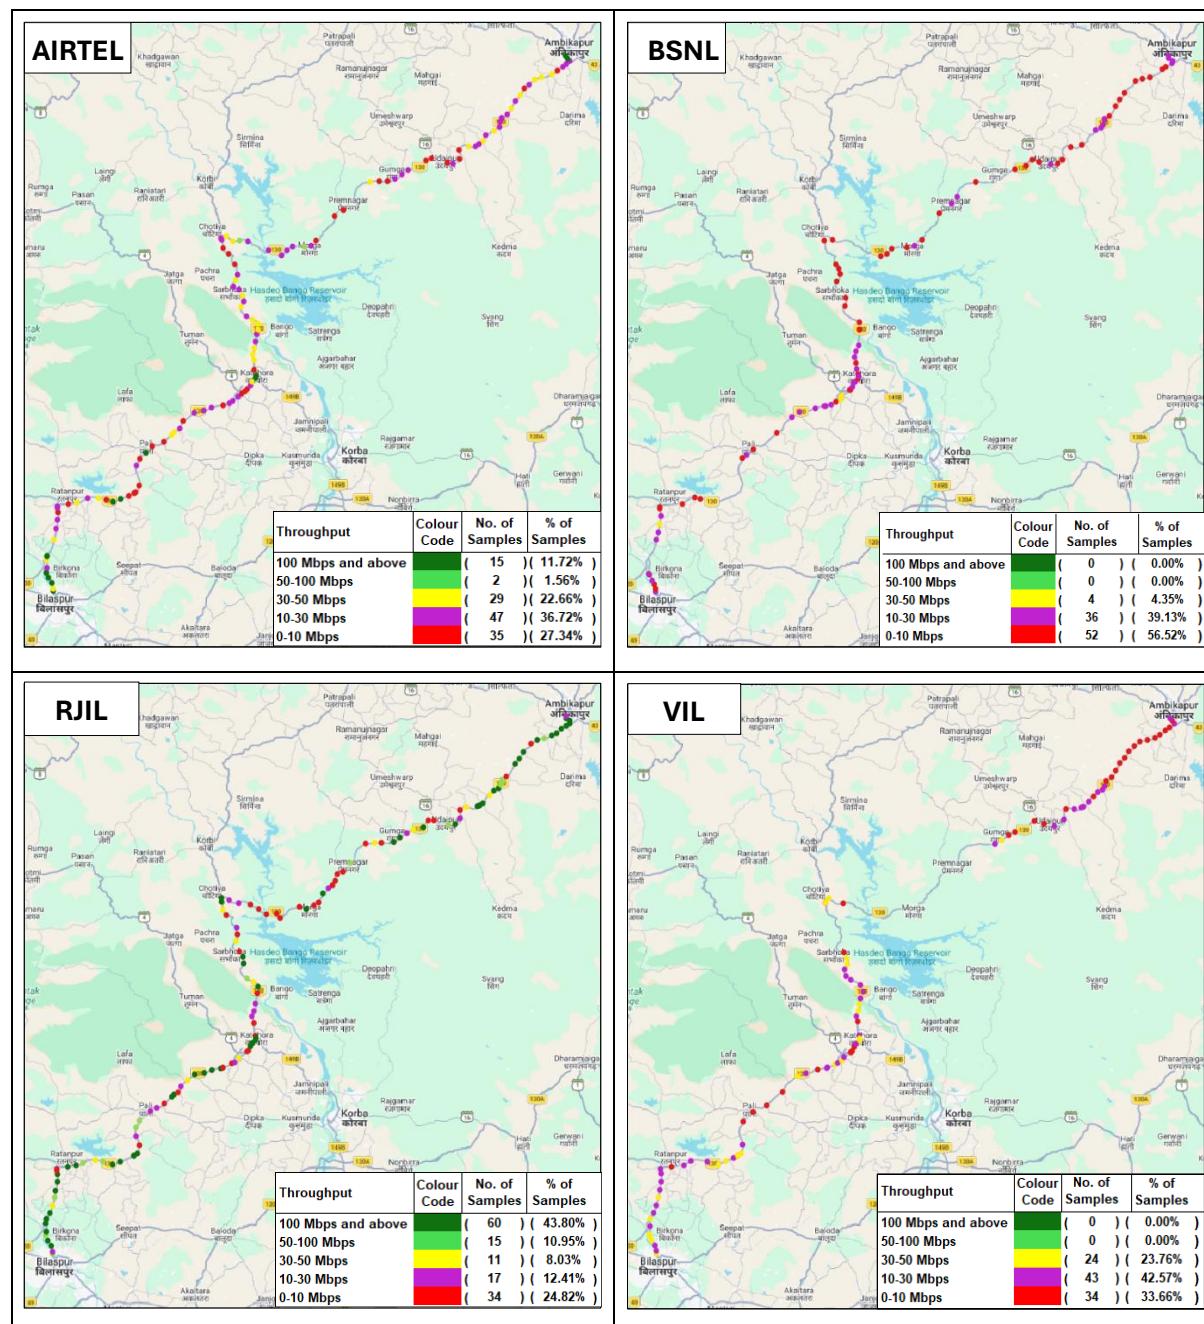

Note: Plot is based on Dynamic Drive Test results only.

(ii) Upload Throughput

Parameter	Measured in	AIRTEL (upto 5G)	BSNL (upto 4G)	RJIL (upto 5G)	VIL (upto 4G)
Typical upload throughput declared by TSP	(Mbits/s)	2.84	3.00	7.00	8.00
Average Upload Throughput measured during IDT	(Mbits/s)	11.53	4.99	15.93	12.06

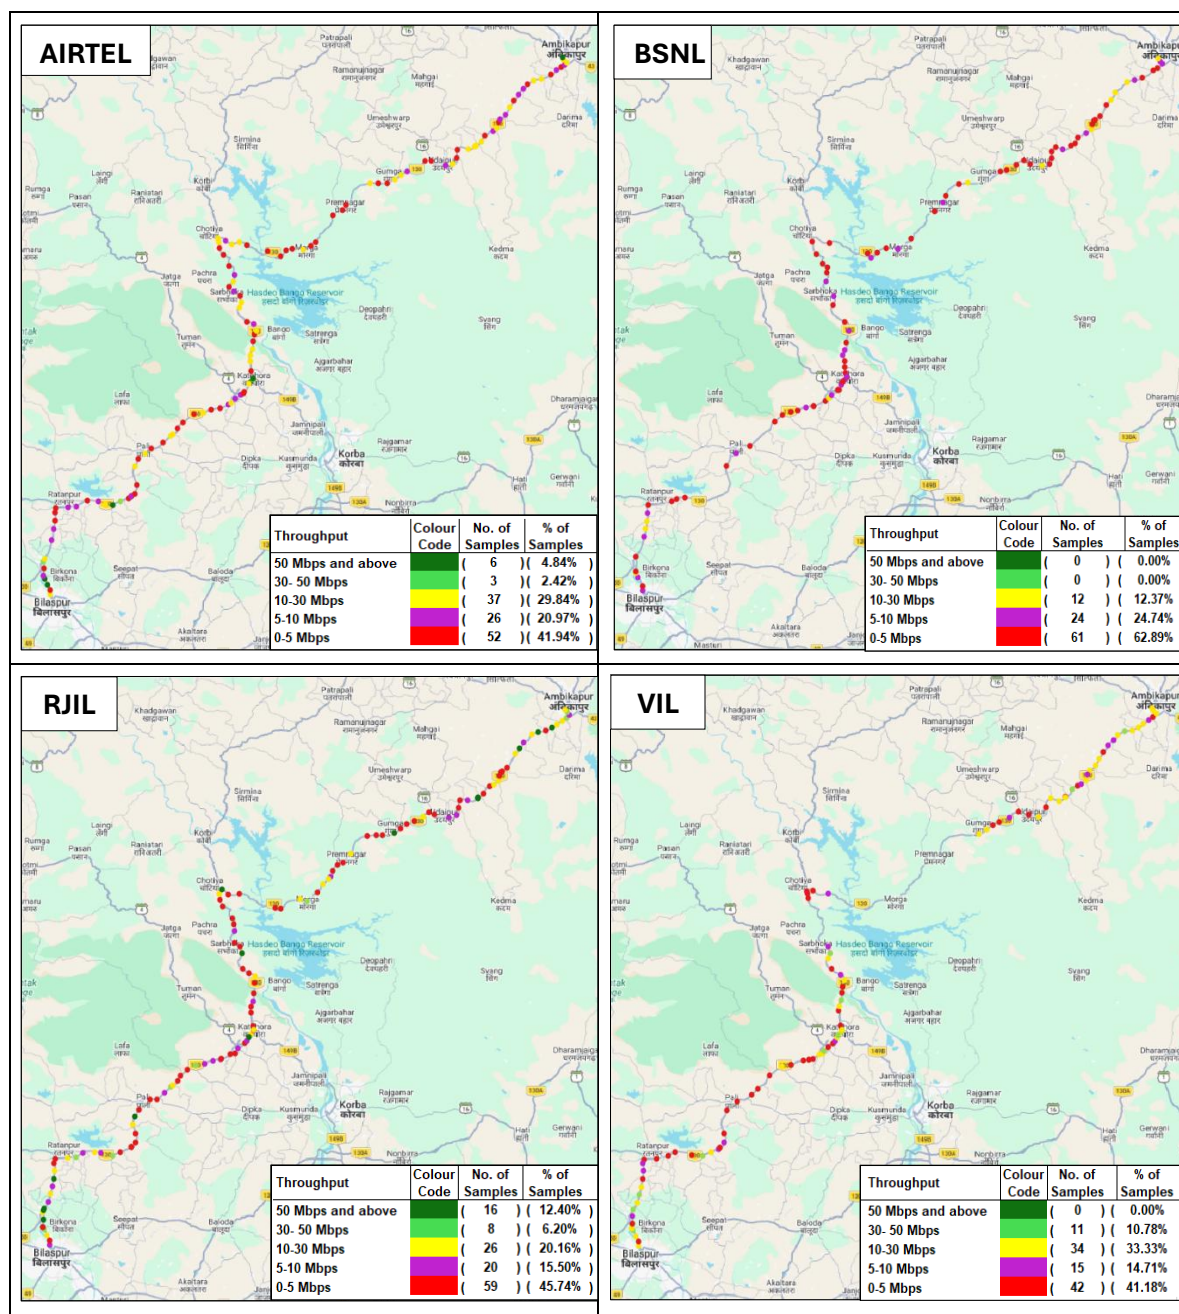

Note: Plot is based on Dynamic Drive Test results only.